

CB MOBILE ANTENNA 1/4 WAVE WITH ANTI-THEFT LOCK BLACK SPECIAL MAX BASE

AP6704 - AP6904 - AP6907

TECHNICAL DATA

Steelbras CB 1/4 wave antennas were designed to operate as mobile radio transceiver stations in the citizens band (27 MHz, 11 meter band). Made of polished aluminum and high-quality stainless steel.



This antenna is available in the following versions:

AP6704 - CB mobile antenna 1/4 Wave TOK Black Special Max Base.


AP6904 - CB mobile antenna 1/4 Wave PREMIUM w/ Anti-theft Lock Black Special Max Base.

AP6907 - CB mobile antenna 1/4 Wave FORCE w/ Anti-theft Lock Black Special Max Base.

MOBILE ANTENNA CB 1/4 WAVE DISCOVER THE SPECIAL BASE BY STEELBRAS

FULLY SOLID BASE

EXTREMELY SUPERIOR EFFICIENCY
IN TRANSMISSION AND RECEPTION.
FIRMER WHIP, LESS SWAY.
ENABLES BETTER VSWR TUNING.
NO POOR CONTACT,
DOES NOT BREAK.




IMPORTANT:

For best results, use an SWR meter.

SPECIFICATIONS

FREQUENCY	26 - 54 MHz
MAXIMUM POWER	500 W
IMPEDANCE	50 Ω
VSWR	$\leq 2,0:1$
GAIN	2,15 dBi
HEIGHT	2720 mm
WEIGHT	660 g

See below the SWR chart of an antenna tuned to 27,015 MHz.

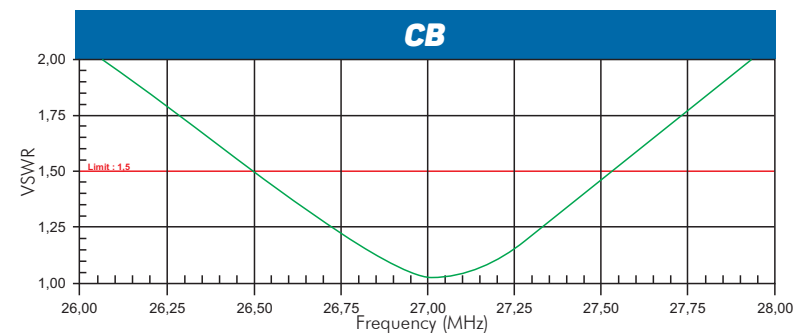

A 2mm Allen key is required to adjust the antenna (not included).



steelbras[®]
soluções em antenas

AVENIDA CIDADE FUKUYAMA, 725 - CEP 19064-210 - PRESIDENTE PRUDENTE/SP
WWW.STEELBRAS.COM.BR

CB MOBILE ANTENNA 1/4 WAVE WITH ANTI-THEFT LOCK BLACK SPECIAL MAX BASE

AP6704 - AP6904 - AP6907

TECHNICAL DATA

Steelbras CB 1/4 wave antennas were designed to operate as mobile radio transceiver stations in the citizens band (27 MHz, 11 meter band). Made of polished aluminum and high-quality stainless steel.



This antenna is available in the following versions:

AP6704 - CB mobile antenna 1/4 Wave TOK Black Special Max Base.


AP6904 - CB mobile antenna 1/4 Wave PREMIUM w/ Anti-theft Lock Black Special Max Base.

AP6907 - CB mobile antenna 1/4 Wave FORCE w/ Anti-theft Lock Black Special Max Base.

MOBILE ANTENNA CB 1/4 WAVE DISCOVER THE SPECIAL BASE BY STEELBRAS

FULLY SOLID BASE

EXTREMELY SUPERIOR EFFICIENCY
IN TRANSMISSION AND RECEPTION.
FIRMER WHIP, LESS SWAY.
ENABLES BETTER VSWR TUNING.
NO POOR CONTACT,
DOES NOT BREAK.




IMPORTANT:

For best results, use an SWR meter.

SPECIFICATIONS

FREQUENCY	26 - 54 MHz
MAXIMUM POWER	500 W
IMPEDANCE	50 Ω
VSWR	$\leq 2,0:1$
GAIN	2,15 dBi
HEIGHT	2720 mm
WEIGHT	660 g

See below the SWR chart of an antenna tuned to 27,015 MHz.

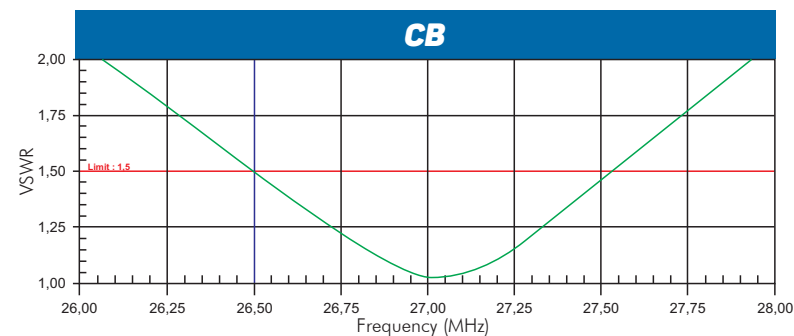

A 2mm Allen key is required to adjust the antenna (not included).



steelbras[®]
soluções em antenas