


# CB MOBILE ANTENNA CENTER COIL CANARINHO SPECIAL MAX BASE

**AP3000 - AP30000 - AP30100**

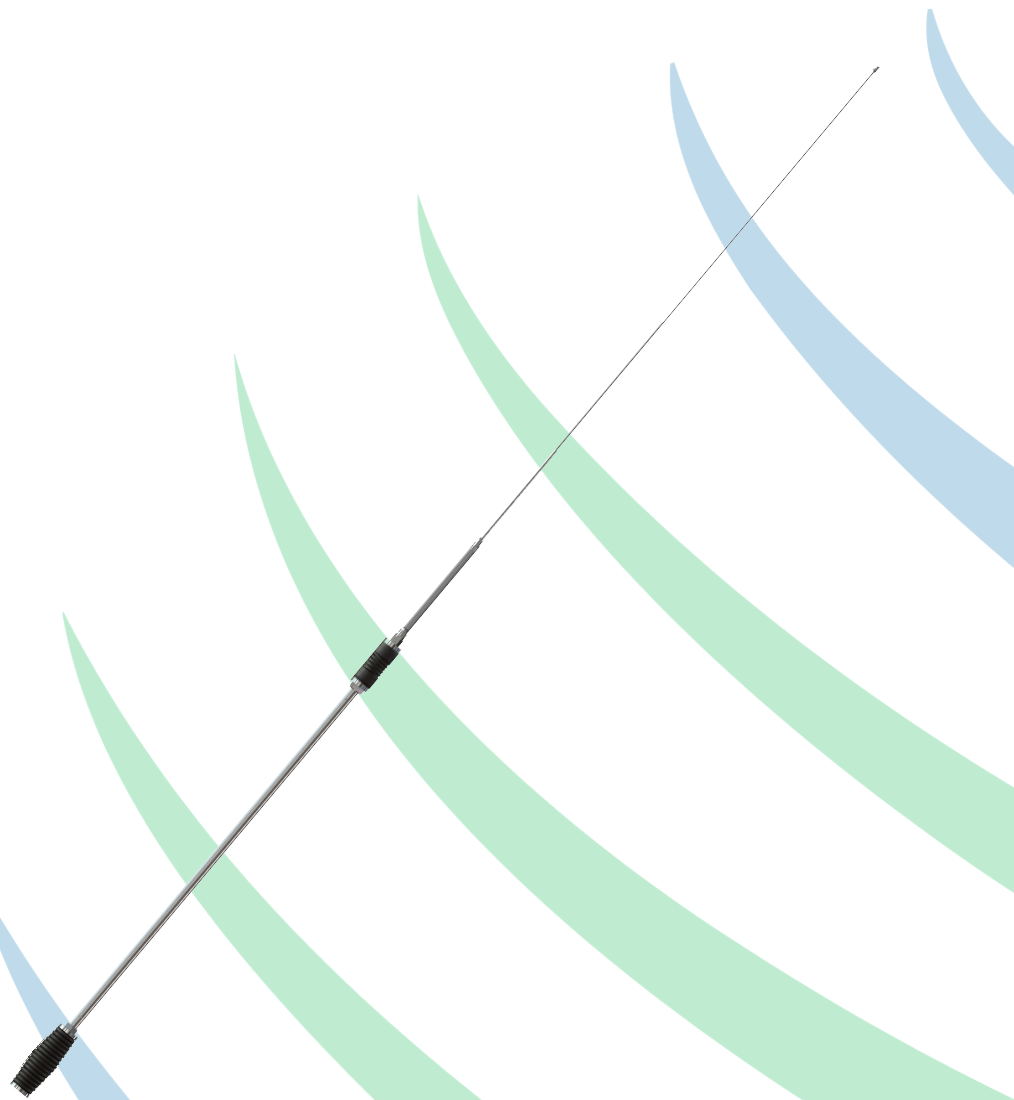

**steelbras**  
soluções em antenas

## TECHNICAL DATA

**AP3000** is an antenna with a high-efficiency center coil, designed to operate in the citizens band (27 MHz - 11 Meters). Made of stainless steel, chrome-plated brass, nylon coil core and high-performance enameled copper wire. It uses the same mounting standard as the traditional "MARIA MOLE", also with the same anti-theft locking system on the base. **(Patented)**


### Ideal Size for Installation!

The size of this antenna allows it to be installed in many places the traditional model cannot, places that may give better operating conditions compared with the traditional model, which is normally installed between the truck cab and body! With the extender, the frequency can be adjusted from 26 to 28 MHz. **Greater efficiency in installation and performance.**

**IMPORTANT:** For best results, use a VSWR meter.

**MOBILE ANTENNA  
CB 1/4 WAVE  
DISCOVER THE SPECIAL BASE  
BY STEELBRAS**

**FULLY SOLID BASE**  
EXTREMELY SUPERIOR EFFICIENCY  
IN TRANSMISSION AND RECEPTION;  
FIRMER WHIP, LESS SWAY;  
ENABLES BETTER VSWR TUNING;  
NO POOR CONTACT;  
DOES NOT BREAK.

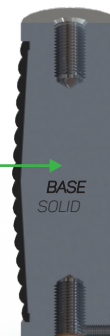

### SPECIFICATIONS

|             |
|-------------|
| 26 - 28 MHz |
| 100 W       |
| 50 Ω        |
| ≤ 1,5:1     |
| 2,15 dBi    |
| 1840 mm     |
| 766 g       |


**This antenna is available in the following versions:**

**AP3000-** CB mobile antenna 1/4 Wave Canarinho Center Coil with Special Max Base.

**AP30000** - Special Max Base Extender for Canarinho CB Coil.

**AP30100** - Whip with mini Chrome extender.

**EXAMPLE** See below the VSWR chart of an antenna tuned to 27,015 MHz.

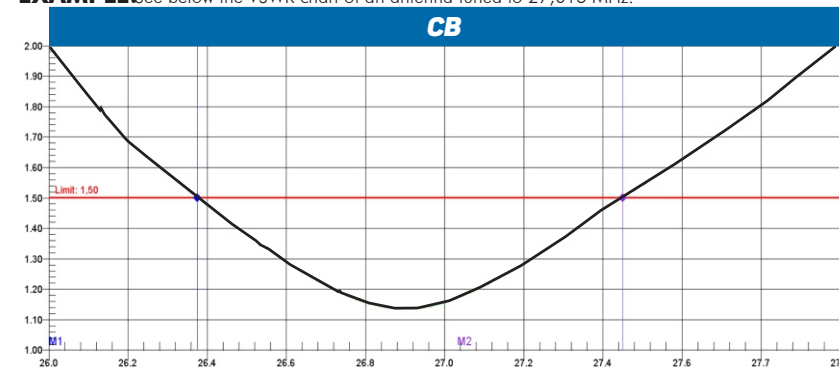

A 2mm Allen key is required to adjust the antenna (not included).

### ANTENNA SOLUTIONS

AVENIDA CIDADE FUKUYAMA, 725 - CEP 19064-210 - PRESIDENTE PRUDENTE/SP  
**WWW.STEELBRAS.COM.BR**

